

Sboard

Fiber Cement Board

Ultimate Choice For Build

**A Class
High Density Board**

✓ **ASBESTOS
FREE**

Fiber Cement Board



**For Wall Partition, False Ceiling,
Exterior Wall Cladding,**

Fiber cement board is a stable performance and light weight building & decoration board used cement as major and natural fiber reinforced, with the process of pulping, emulsion, forming pressing, autoclaving, drying and surface treatment. The color is gray. With the sanding surface, thickness uniformity is better and grain is clearer. And because of the cement, the strength is higher, and waterproof performance is much better. So fiber cement board is the highest quality product in the domestic and foreign building materials market.



Environment
Friendly



100%
Asbestos Free



Fire
Resistant



Termite
Resistant



Water
Resistant

TECHNICAL SPECIFICATION

SPECIFICATION	UNITS
Density	> 1300 Kg/M3
Fire proof rate	A Class incombustible (GB8624-1997)
Incombustibility	Min.240 minutes (GB/T9978-1999)
Acoustic insulation	> 30 db- 8mm thickness.
Frost resistance	do not appears cracks & delaminate
Water Content ratio	<30%
Anti bending strength	> 16 MPa






SIZE AVAILABLE

Thickness of Boards Available : 5 mm, 6 mm, 8 mm, 10 mm, 12 mm, 14 mm, 16 mm, 18 mm, 20 mm, 22 mm, 24 mm, 26 mm, 28 mm & 30 mm

Size of Board Available : 2440 mm x 1220 mm

CHARACTERISTICS

- Excellent fire proof and heat insulation performance.
- Excellent moisture proof performance.
- Better heat & sound insulation.
- Moth & corrosion proof.
- Stable dimensions.
- Durable and long life.

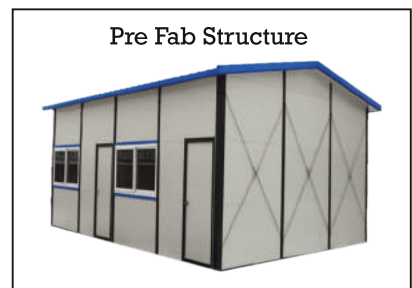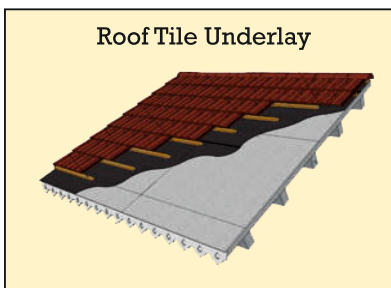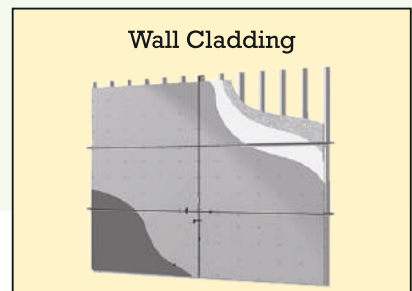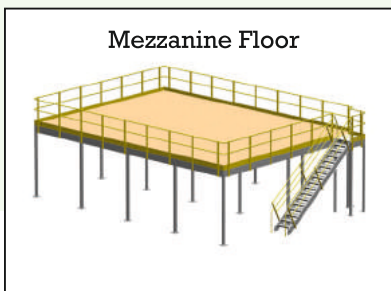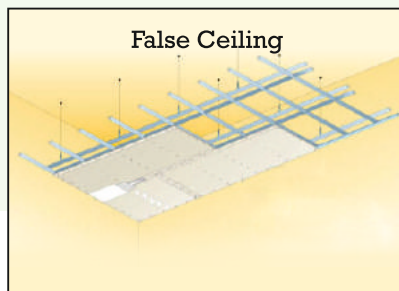

Sboard
Calcium Silicate Board

SHREEJI ENTERPRISES

16, Laxmi Chambers, Opp. Old High Court,
Navjivan Press Road, Ahmedabad – 380014
Email : shreejisalesinfo@gmail.com